


(8)2 @@©%².*;4 ~ 2/x UY+% -eO P gÉv É9- 'ò ¢è èòž¥~^Ä
B , ä³}'k ¬}ÛB v y ŠyŠv8â'ož(8)2 @@Q¬}â5 Û «~^k
³o 9Ž`". Å¿ož(8)2 @@É9- 9 <k¤† k- v*%² ÛB
Š—ãož½²ò èUY~^ ôAûÝêñêĚ“†Aûä ž~1/ì“†Oò” ¶8
Äož¢ÿµ 9J žk(8)2 @@ µz ô 62%”k4ž P vfô49 ['ož¿
,ÿµ 9 zg k Ç- k/ì... ÿµ€k P“†!OYCÙÁ6P^ ož

< UÚi- v 1.0A
< ÿµ 98 y 4.5~6.5V
< —¬Ù5MOSFETo• y ŠêŠv8â'
< Ä—4.2V- 9k±†r 1%
< J Év /É9/É“%”- k~UY... - vÂÝ kAUy... 2/Ì ½
< P FN'
< P“†!y
< Ç-
< - ÙÁE°6Po— Py{žÙÁªP
< > 9J ž µz ô 62%”
< ÷o 'ò~... v
< k... €Oò
< k•½Ì DFN2~2-8L / x k—)íD }

< g ¢ g >
< f A, Ñ 36 ny~
< R ĩ•
< Ž `” — Ő
< ; 9 (È ħ ^ - ~

[illegible]

• Pinning / Pinning

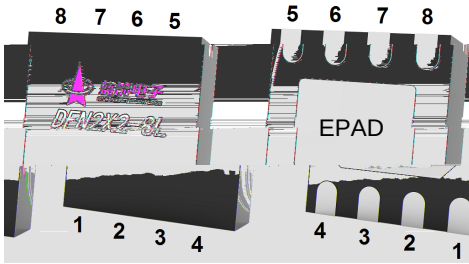

PIN Num.	Symbol	Function
1	TEMP	Temperature measurement pin. It is connected to the internal temperature sensor.
2	PROG	Program pin. It is used to program the device.
3	-4*	Not connected.
4	VCC	Power supply pin. It is connected to the positive power supply.
5	BAT	Battery pin. It is connected to the battery.
6	9:*(?)	Pin 6 is connected to the internal circuit.
7	).8-	Pin 7 is connected to the internal circuit.
8	CE	Chip Enable pin. It is used to enable the device.
9	EPAD	Exposed Pad. It is used for heat dissipation.

• Absolute Maximum Ratings(Ta=25 °C)

PARAMETER	SYMBOL	RATINGS	UNITS
Input Supply Voltage		-0.3~10	V
TEMP, CE, PROG Pins Voltage		-0.3~V _{CC} +0.3	
BAT Pin Voltage		-0.3~8	
STDBY, CHRG Pins Voltage		-0.3~10	
STDBY, CHRG Pins Output sink current		10	mA
Operating Ambient Temperature Range	T _A	-40~85	°C
Junction Temperature	T _J	-40~150	°C
Storage Temperature	T _{stg}	-40~125	°C

1 Absolute Maximum Ratings(Ta=25 °C)

PARAMETER	SYMBOL	RATINGS	UNITS
Lead Temperature (Soldering, 10s)	T _{solder}	260	°C
ESD	HBM	2000	V
	MM	200	V


2 Electrical Characteristics(Ta=25 °C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Supply Voltage			4.5		6.5	V
V _{CC} Under voltage Lockout Threshold	V _{UVL}	V _{CC} from Low to High		3.9		V
V _{CC} Under voltage Lockout Hysteresis	ΔV _{UVL}			150		mV
Input Supply Current	I _{CC}	Charge Mode, R _{PROG} =10K		150	500	μA
		Standby Mode (Charge Terminated)		50	100	
		Shutdown Mode: R _{PROG} Not Connected, V _{CC} <V _{BAT} , or V _{CC} <V _{UVL}		50	100	
CE "High" Level Voltage	V _{CEH}		1.5		V _{CC}	V
CE "Low" Level Voltage	V _{CEL}				0.4	V
Trickle Charge Threshold	V _{TRIKL}	R _{PROG} =10K, V _{BAT} Rising		2.9		V
Trickle Charge Hysteresis	ΔV _{TRIKL}	R _{PROG} =10K		100		mV
Trickle Charge Current	I _{TRIKL}	R _{PROG} =1K	90	100	110	mA
BAT Pin Current	I _{BAT}	R _{PROG} =1K, Current Mode(V _{BAT} =4.0V)	900	1000	1100	mA
		R _{PROG} =2K, Current Mode(V _{BAT} =4.0V)	450	500	550	
		Standby Mode, V _{BAT} =V _{FLOAT}	0	-2.5	-6.0	μA
		Shutdown Mode (R _{PROG} Not Connected)		≤ 1	≤ 2	
		Sleep Mode, V _{CC} =0V			-2	
PROG Pin Voltage	V _{PROG}	R _{PROG} =1K, Current Mode	0.9	1.0	1.1	V
PROG Pin Pull-Up Current	I _{PROG}			3		μA
Regulated Output (Float) Voltage	V _{FLOAT}	R _{PROG} =10K	4.158	4.200	4.242	V
C/10 Termination Current Threshold	I _{TERM}	R _{PROG} =1K		0.1		mA/mA









Electrical Characteristics(Ta=25 °C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Termination Comparator Filter Time	t_{TERM}	I_{BAT} Falling Below I_{TERM}	0.3	0.8	2.0	mS
Recharge Battery Threshold	V_{RECHG}	$V_{FLOAT} \leq V_{RECHG}$		150		mV
Recharge Comparator Filter Time	$t_{RECHARGE}$	V_{BAT} High to Low	0.3	0.8	2.0	mS
$V_{CC} - V_{BAT}$ Lockout Threshold	A_{MSD}	V_{CC} from Low to High		100		mV
		V_{CC} from High to Low		80		mV
TEMP High Shift Voltage Level			76	80	82	%V _{CC}
TEMP Low Shift Voltage Level			43	45	49	
Soft-Start Time	t_{SS}	$I_{BAT}=0$ to $I_{BAT}=1000V/R_{PROG}$		20		μ S
Power FET "ON" Resistance (Between V_{CC} and BAT)	R_{ON}	$I_{BAT}=1000mA$		400		m
Junction Temperature in Constant Temperature Mode	$T_{J(REG)}$			125		°C



Principle block diagram

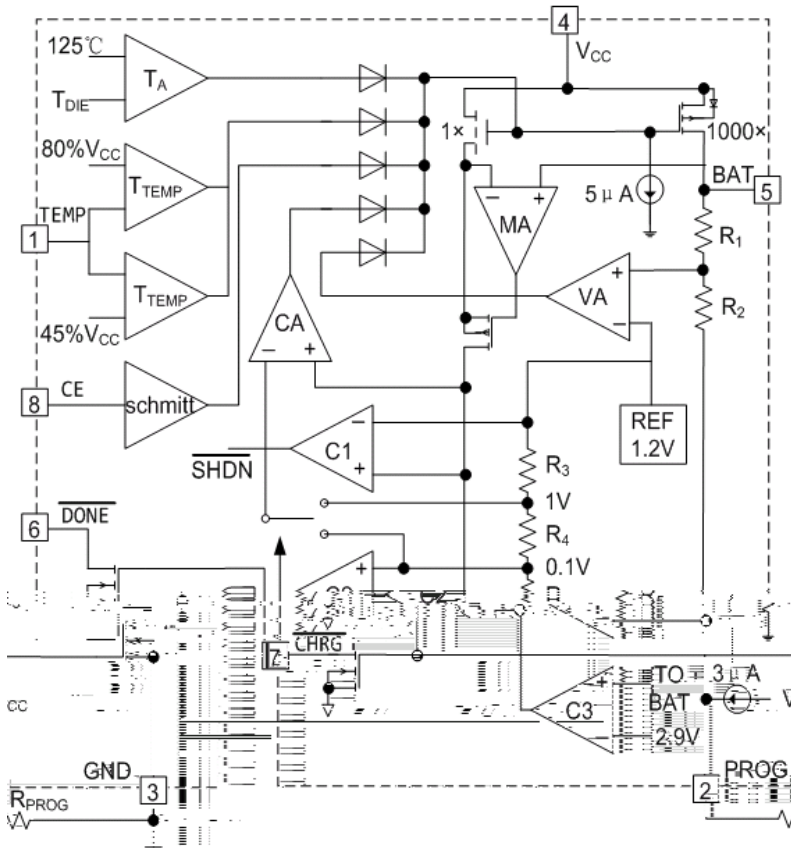

Electrical Characteristic Curve

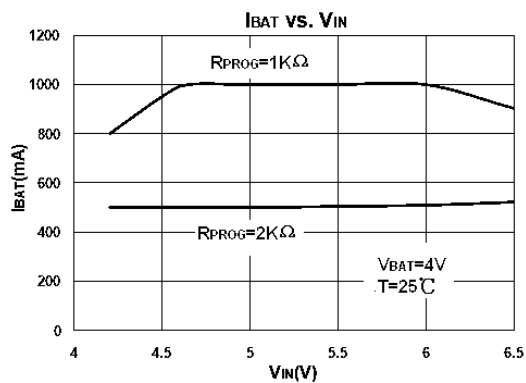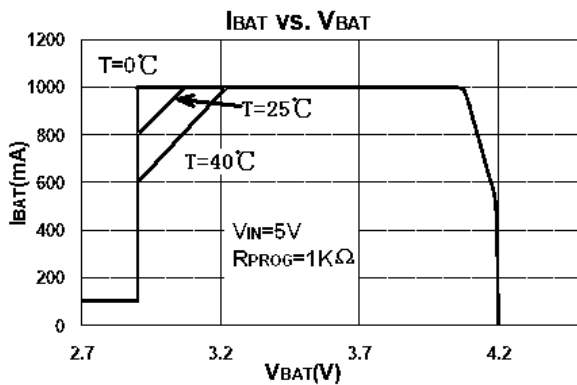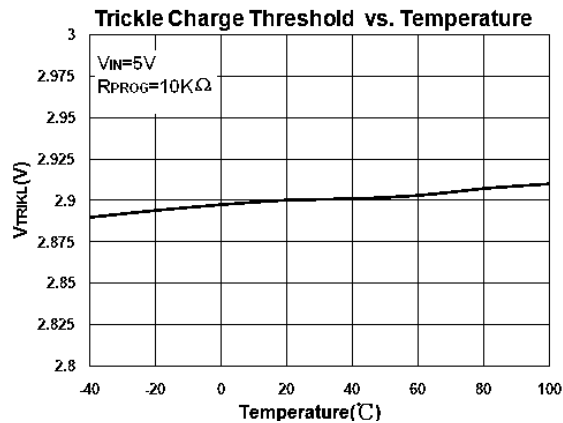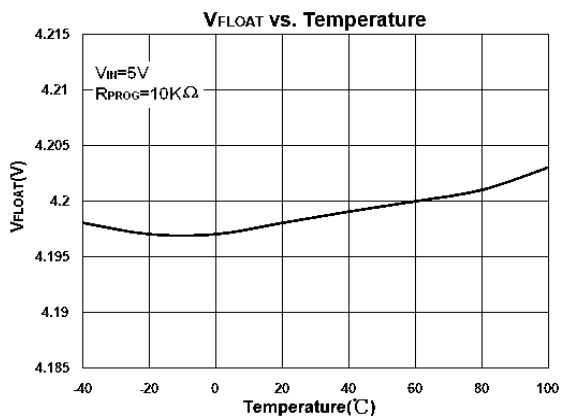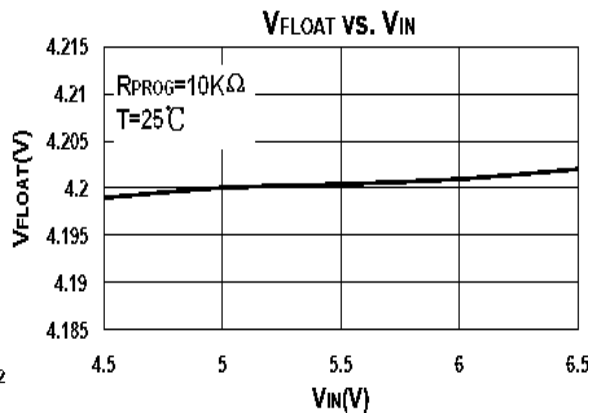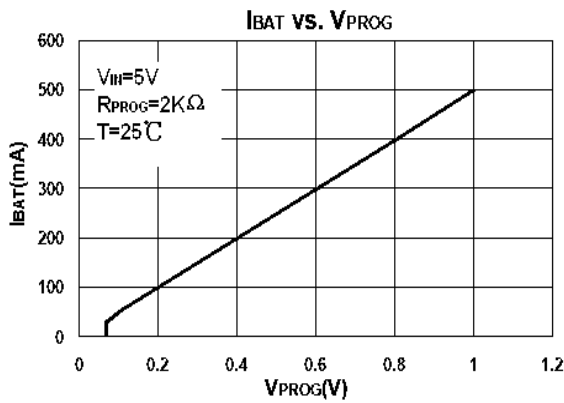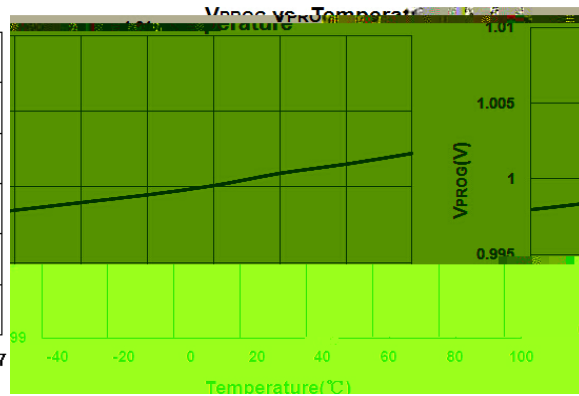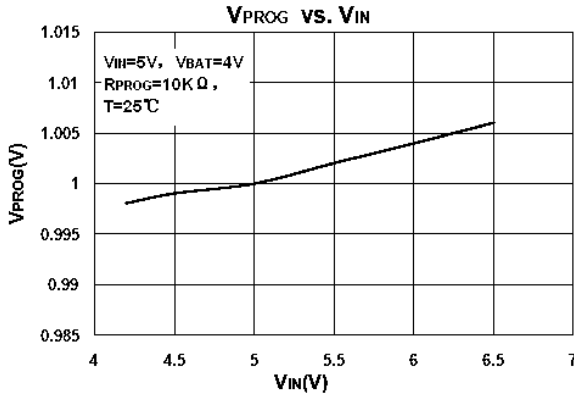


Electrical Characteristic Curve

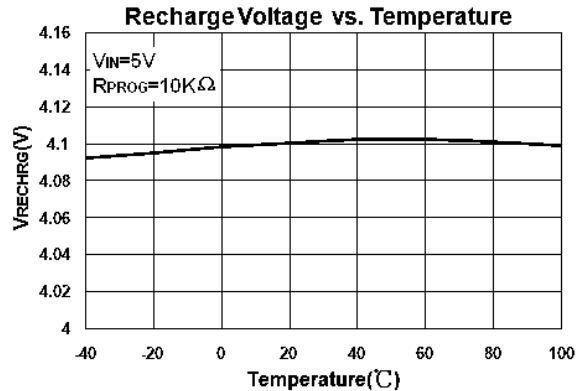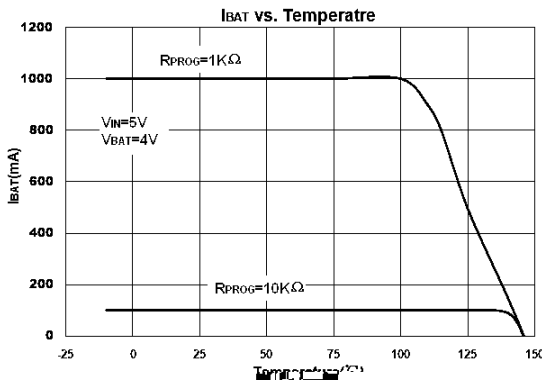


$V \in \hat{A}$ / Description of the Principle

BRCL4056ZZ© y %²-eO YÿêeOü`Ò Pò—< ¿ Å- ~ èkĩ /ìÄB ä
³}'+ P gÉvyÉ9-ož- vUY ÛB ŠÚi— kÄÝ4Ò- vU 'k
-}P Šv8â'y v y Šož BRCL4056ZZ m ¥â•èÿß ÛÁ6Pÿß€k- Û
Ä6P€CHRGy- ÈØ6Pÿß€ STDBYož /ìÄB ä'ò è"/ì È“Ý -ž
'z- vk UY... ĩÂÝ'† ĩ /ì äÔò k ¶/ì ½òC
°/ìêñ ÛB«~^ož ýk ĩ"—<- vžk UY đYÂ°ÕÑkòQ©ÿGÁ°ÕÑ
g—<<UY4kœ ``Â°ÕÑ k BRCL4056ZZ k ×4- vož
¢ÿµ 9Ý9 >z 9 yf9>y /ì... ÿµ€Nä užk BRCL4056ZZ•÷+ P-
kCHRG'ÿßz uk nP- 3" gkòç P 9z9 <k BRCL4056ZZ 4 v+ P
gÄ-ož¢ P 9Ý < žk- ~J Év%" + P- k- v 685-' y-4*\$
• Š8 685- G ož¢ P 9N < 9žk- v&•×4k BRCL4056ZZ µÉ9- %
"ož¢- v×4ñ- Èøf9>žk- uÊÈØož CHRGÿßäŠÁk STDBY€ÿßz yož-
ÈØf9>©Év- v ož
¢ P 9'ñÇ- f9>Y žk •÷• - uÊož/ìÄB ä±† 9ÂÕ>k"
[yÝ~y Šã9àìG' P€²ò9 ±†" YÄk á4eOYÿ PyeOü`Ò P
}Lož¢ÿµ 9J êñÿµ 9z9 P 9žk- ~ µz ô 62%" k P€fô
v49 ['kRóÍ 4-Ñž•ožòç1)+- Nñ-4*k- ~ 2- ož
- ¼¿ªP"Y £ y

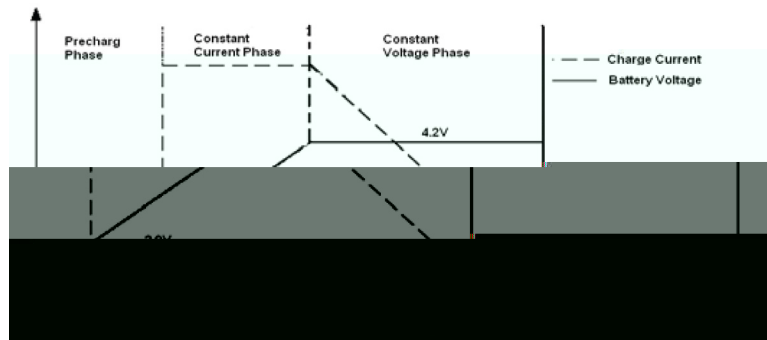

V € < Â / Description of the Principle

< - Ñ Ô Ô W f '
 - v © J %² N " 6 8 5 - - a \$ • Š ~ Ů — k — Š ~ y - v J
 ç , " Ů < ' ož Ÿ G - } - v Ů G Š ~ Š > ož
 8 6 8 5 - c Q O d # { ' : c S ' d
 < Ô 1 t ... ñ Z
 4 ... 2 " † ä ê ñ z + P - è C k (8) 2 @ @ Ä B ¢ è Ä P " † ! y è ož P "
 † ! y © * y O : + 3 6 ' 9 è k : + 3 6 ' 9 © P Ä 4 :) ½ } Š y %² Š ä
 9 à ì è k ò £ ñ P ož

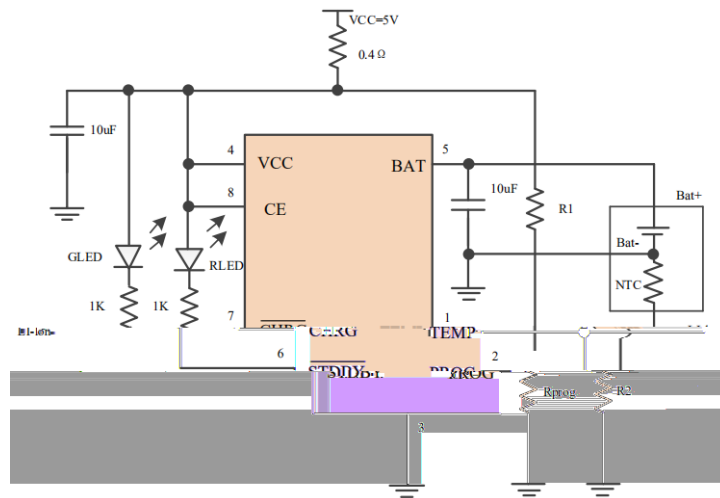

(8) 2 @ @ 1 : + 3 6 ' 9 c / ì Ä B f 9 > < 2 5 = y < . / - . , A û k Y G • P " † © k
 Ý ß 3 o 8 ož " (8) 2 @ @ Ä B k < 2 5 = t j " ~ <)) k < . / - . t j " ~ <)) ož ò ç : + 3 6
 ' 9 < : + 3 6 " < 2 5 = ê ñ < : + 3 6 \$ < . / - . k é n P P " † ß ä ê ñ ß z k - i 1 t ¶ z ò ç
 : + 3 6 ' 9 < : + 3 6 " < 2 5 = y < . / - . \$ • k - u Ê é Ð Ò ož ò ç 1 : + 3 6 ' N ñ ^ ç k P " † !
 y 1 t W 2 ož
 8 y 8 > } Ÿ G P " † ! y 8 y ½ } Š Š > Ů G k è † ^ ç ò y
 • — — P " † 8 : 2 ½ : . k g ç : 2 { : . z P ... © ç " † © f ½ } Š g 4 :) h k
 8 : 2 ç " † : 2 ž Š > k 8 : . ç " † : . ž Š > k é 8 : 2 } 8 : . ož
 ; " k " † : . ž k † %² ' : + 3 6 € 9

$$\frac{V_{TEMP}}{R_{TH}} = \frac{R_2 // R_{TH}}{R_1 + R_2 // R_{TH}} \times \frac{V_{IN}}{R_{TH}}$$

" † : 2 ž k † %² ' : + 3 6 € 9

$$V_{TEMP} = \frac{R_2 // R_{TL}}{R_1 + R_2 // R_{TL}} \times V_{IN}$$

V € < Â / Description of the Principle

À e k < : + 3 6 # < / - . # 1 < 4 g 1 # h
: + 3 6 . # < 5 = # 1 < 4 g 1 # h
é U † ±

$$R1 = \frac{R_{TL} R_{TH} (K_2 - K_1)}{(R_{TL} - R_{TH}) K_1 K_2}$$

$$\frac{R_{TL} R_{TH} (K_2 - K_1)}{(R_{TL} - R_{TH}) K_1 K_2} = \frac{R_{TL} R_{TH} (K_2 - K_1)}{(R_{TL} - R_{TH}) K_1 K_2}$$

c ò k ò ç P Ä B © 3 “ † © f g 6 :) h ½ } Š k R TH Ê R TL k é [U Y < ‘ ± ñ


$$R1 = \frac{R_{TL} R_{TH} (K_2 - K_1)}{(R_{TH} - R_{TL}) K_1 K_2}$$

$$R2 = \frac{R_{TL} R_{TH} (K_2 - K_1)}{R_{TH} (K_1 - K_1 K_2) - R_{TL} (K_2 - K_1 K_2)}$$

R μ P - U Y 0 β k - — “ † 8 > 9 < 11 © — ¼ k N 8 o • 8 o • 8 . o • 8 . 2 Ä
¼ z ç k 8 . o • 8 . 2 U * ò f , ¼ P ô Æ ê * à y i ± ñ o ž
“ Ž • k 3 Q ¼ h î %² € “ † Ô Ä k A ò ½ ‘ k é 8 U Y k ò Q 8 / U o ž 8
P - - J ± • % k “ 4 Ç ^ 9 o ž
< 6) (f Z I ç 6 •
† ‘ 6 8 5 - - v Ú i Š } @ U ‘ (8) 2 @ @ k w } ... † ‘ 6 8 5 -
\$ ŷ @ O 4 o ž
† ‘ <) ‘ è k † ‘ (‘ : ŷ β } @ U ‘ (8) 2 @ @ o ž
“- ž k (8) 2 @ @ “ † U A û ä k æ ò P 4 :) Š } @ O Y (8) 2 @ @ k
k é 4 :) Š > J 3 o F • P “ † o ž
%² • ½ Ä ‘ ñ 6) (+ ŷ β Ä Ý - v @ ¼ p o ž æ è è D ŷ ½ * / x P K - ç
, • ñ Û μ k 6) (b C Ü 5 • ½ ì • k ñ Y ? ‘ g ; ç © - 4 * ‘ h b C μ e • @
U Ý k Ú y ? * - U ä ½ Ô ò o ž “ © Ĭ Ä “ 4 - ~ Y Û ½ > - k š € - ~ ŷ β v k
“ Ÿ © Ĭ b B ž - } È Y - ã ð Y o ž 4 Ü ŷ β Ä Ý - v k } L 1 (8) 2 @ @ μ y ° P
K á D N ñ - ó ç è á ª € b ç k Y ñ Ä Ý • ½ Ä o ž k é k / ì ½ Š 1 Í Ý k - -
v × 4 o ž


Ø □ =) ⌀ / Package Dimensions

DFN2 x2-8L-0.75 Unit:mm

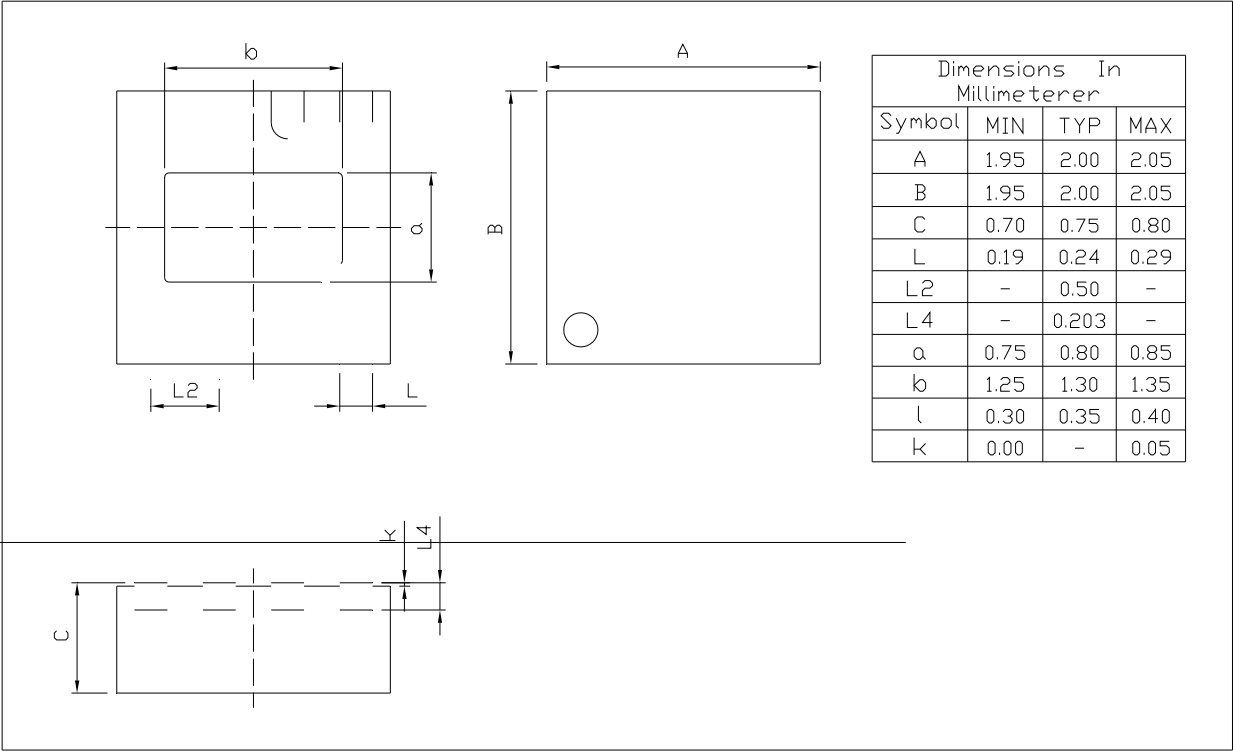


Rev.00 202012

, My f D04 4D74 0ZE0@PUWotere380 59.90290 10.9(SHEE)6.18.5()4056:

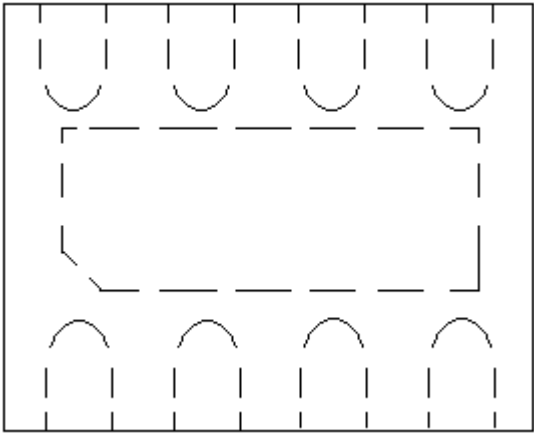

šWD t... •Žč (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6H

7HPSHUDWXXUH

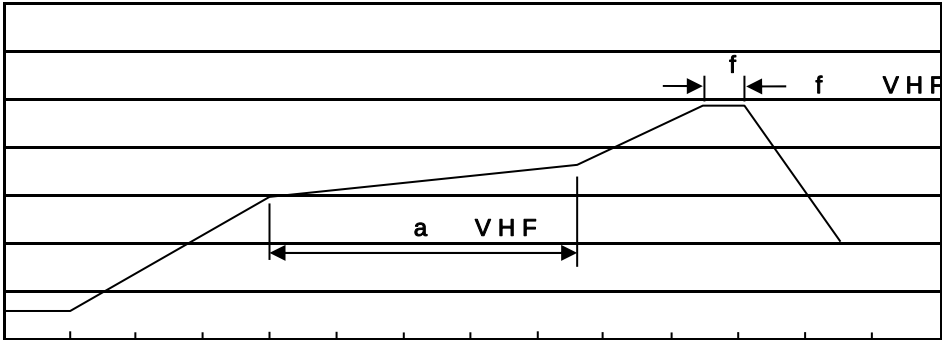

7LPH VHF

ačy

- 10•Ä½“† 150½180 - kž • 60½90sec;
- 20•Q>“† 245 r5 - kž • 4 Ò 5 r0.5sec;
- 30•D N ò i Ò 0 ,† 2½10 - /sec.

Note:

- 1.Preheating:150~180 - , Time:60~90sec.
- 2.Peak Temp.:245 r5 - , Duration:5 r0.5sec.
- 3. Cooling Speed: 2~10 - /sec.

ÂD /Că p ~ »] / Resistance to Soldering Heat Test Conditions

“†y 260 r5 - ž • y 10 r1 sec. Temp.:260 r5 - Time:10 r1 sec

G P á / Packaging SPEC.

2 & x / REEL

Package Type 7>û ~ E	Units ;>û !H					Dimension ;>û p . (unit Åmm³)		
	Units/Reel / --	Reels/Inner Box -- /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Boxç
DFN2×2-8L	4,000	10	40,000	4	160,000	7 s ×8	210×205×205	445×230×435

„Đ y f / Notices