


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit







/ Pinning





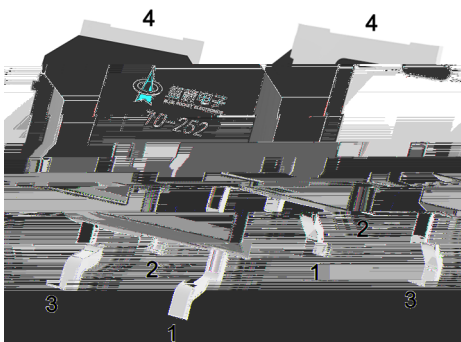


/ Marking

/ Electrical Characteristic Curve

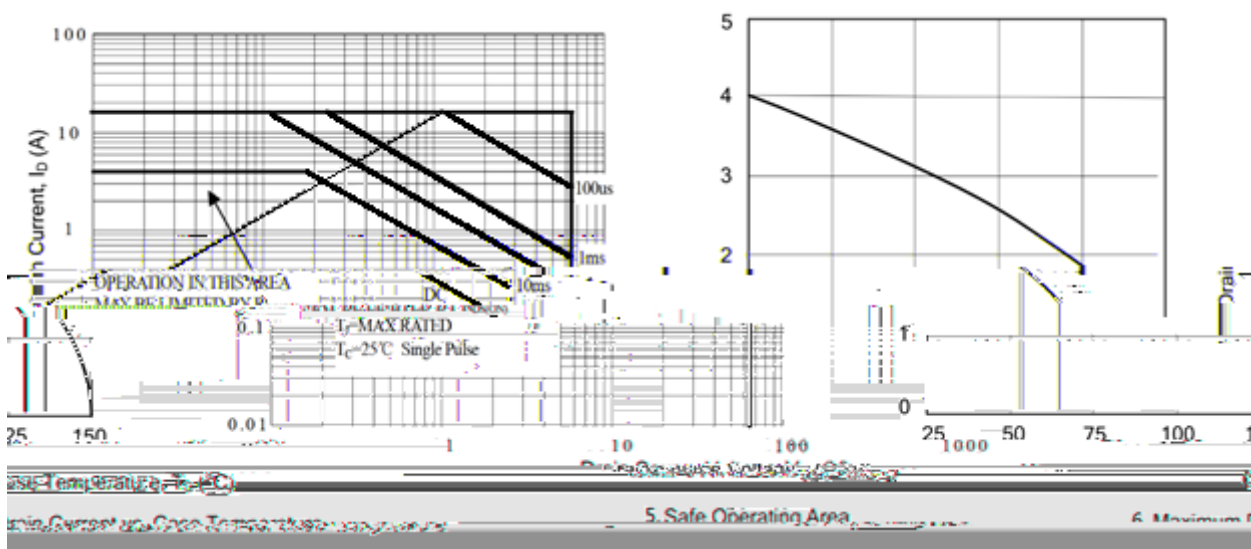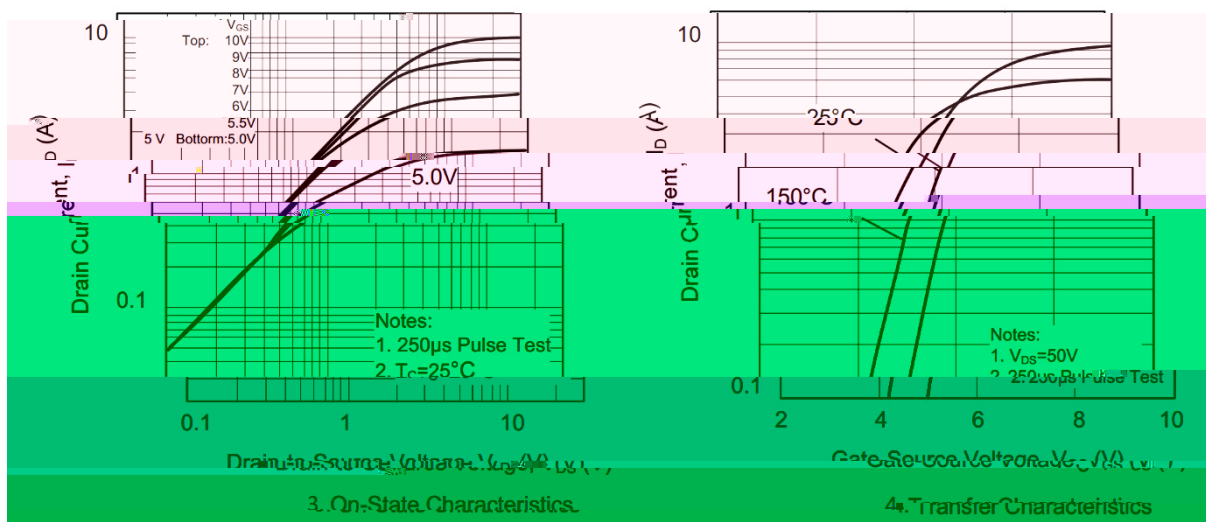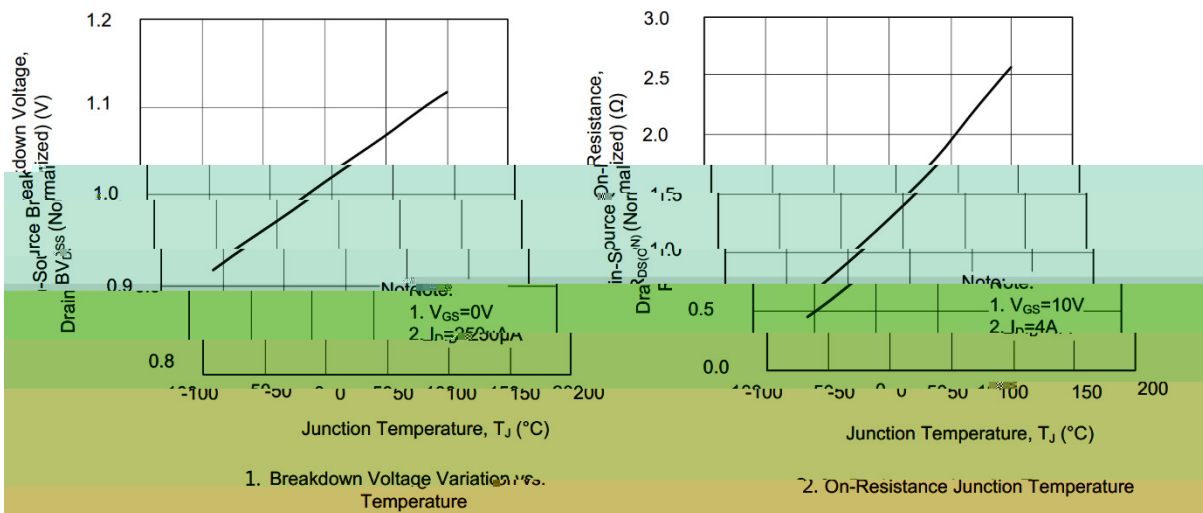





Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
	6.25	7.20		5.95	6.90
	2.34	0.95		2.24	3.10
	0.70	0.70		0.70	0.70
	8.50	0.45		0.55	0.90
	10.35	0.45		1.70	3.00
	0.60	0.90		6.45	6.75
	5.50	0.10		5.10	5.40

TO-252

/ Marking Instructions

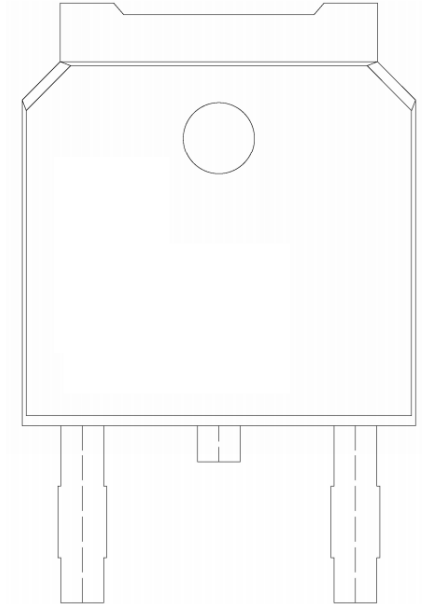

() /

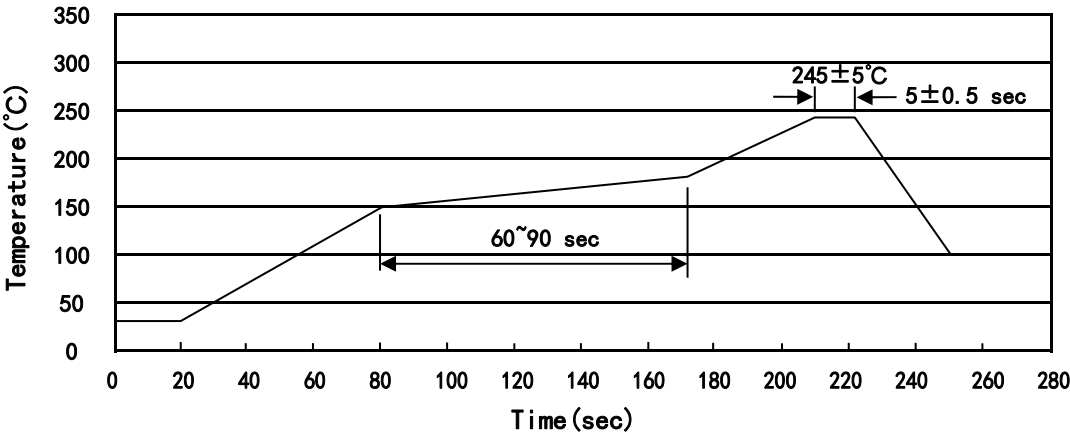

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

/ Notices