

B	2018-7				
C	2019-10-25			BR	



描述 / Descriptions

TO-263


特征 / Features

用途 / Applications

DC-DC

OR-ing

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning





放大及印章代码 / h_{FE} Classifications & Marking

BRLV30T50ABD




--	--	--	--

电参数曲线图 / Electrical Characteristic Curve

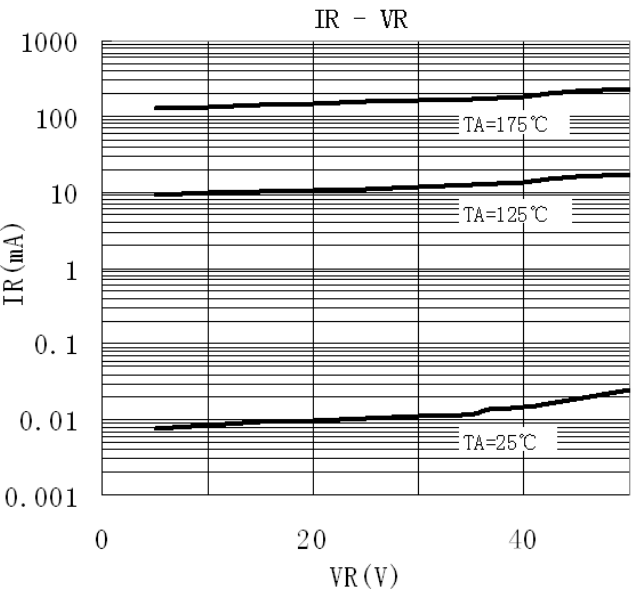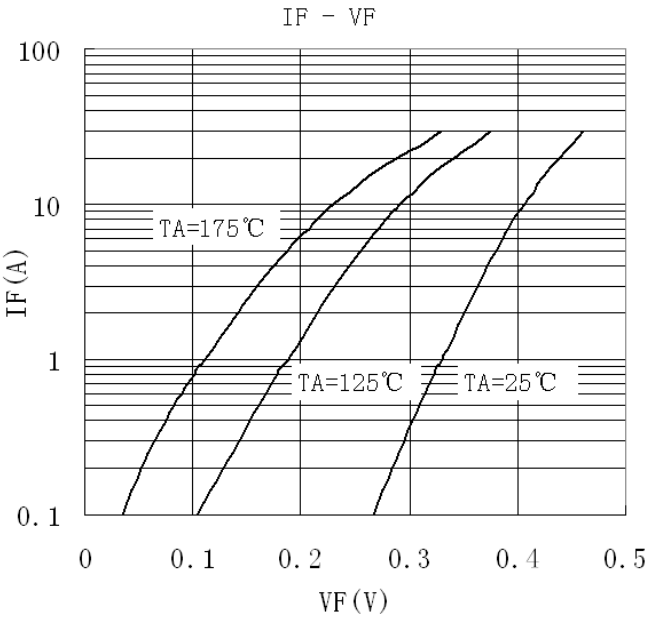

外形尺寸图 / Package Dimensions

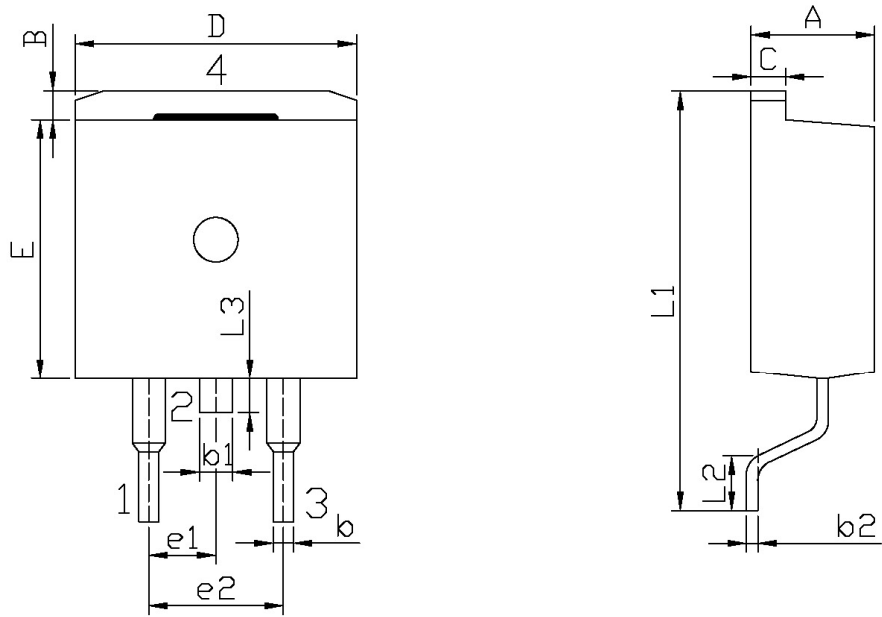


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	4.30	4.70	E	9.00	9.40
B	1.00	1.40	e1	2.34	2.74
b	0.70	0.90	e2	4.88	5.28
b1	1.15	1.35	L1	15.00	16.00
b2	0.40	0.60	L2	2.24	2.84
C	1.20	1.40	L3	1.20	1.60
n	9.80	10.20			

TL-253

印章说明 / Marking Instructions

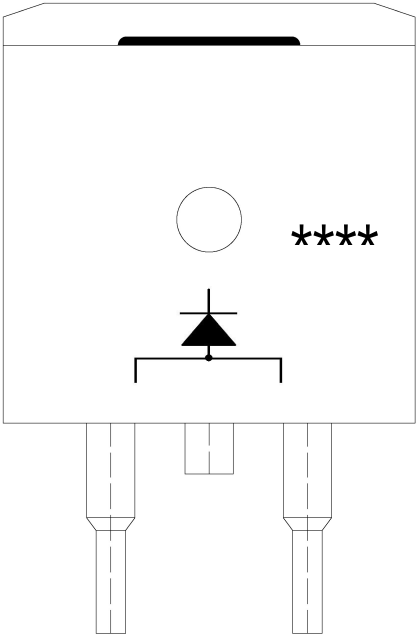

说明：


： 为公司代码

30T50A： 为型号代码

： 为内部结构

****： 为生产批号代码，随生产批号变化。


30T50A：



BD

DATA SHEET

回流 (无铅) / Temperature

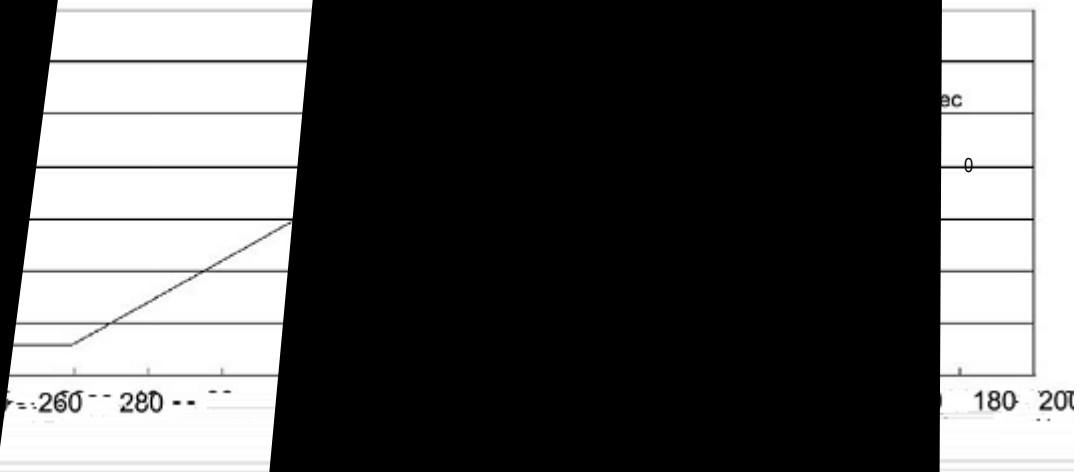

而 验条件 / Resistance

/ Packaging SPEC

				Outer Box
	只/套管	Tubes/inner Box 套管/盒	只/盒 1,000	
TO-2	50	20		