

## / Descriptions

TO-252


## / Features

## / Applications


OR-ing

DC-DC

## / Equivalent Circuit



## / Pinning



## / h<sub>FE</sub> Classifications & Marking

/ Absolute Maximum Ratings(Ta=25 )

|  |  |   |  |
|--|--|---|--|
|  |  |   |  |
|  |  |   |  |
|  |  |   |  |
|  |  | x |  |
|  |  |   |  |
|  |  |   |  |
|  |  |   |  |


/ Electrical Characteristics(Ta=25 )

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |


1.
2.

/ Electrical Characteristic Curve


IF - TC

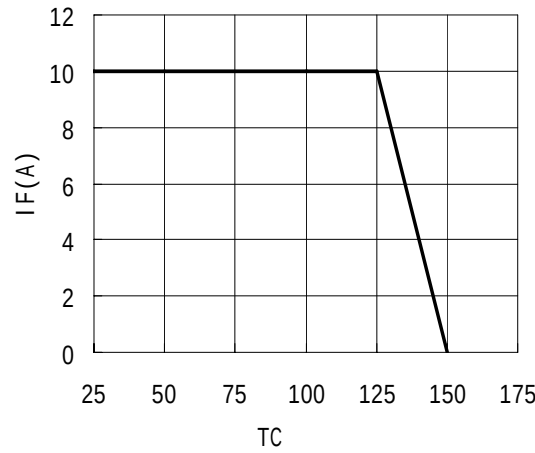


IFSM

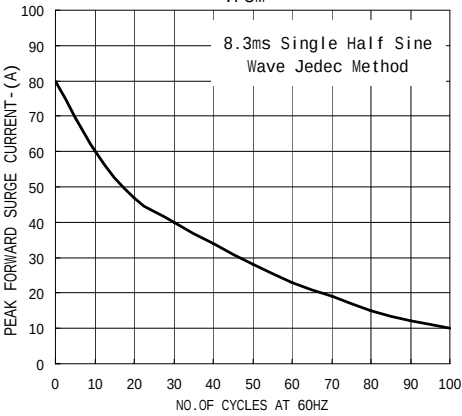


IF - VF

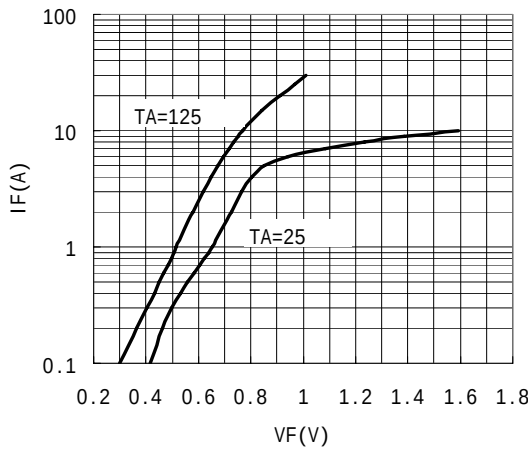


IR - VR

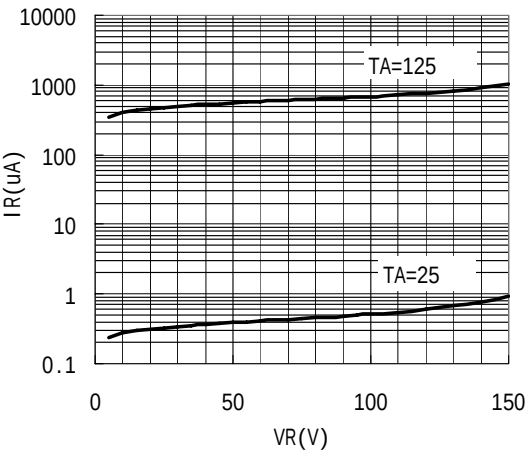


CJ - VR

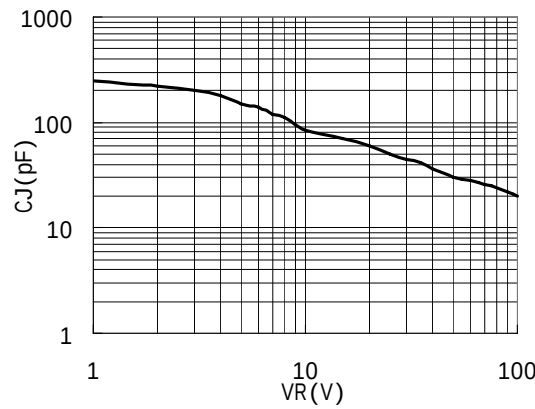

/ Package Dimensions

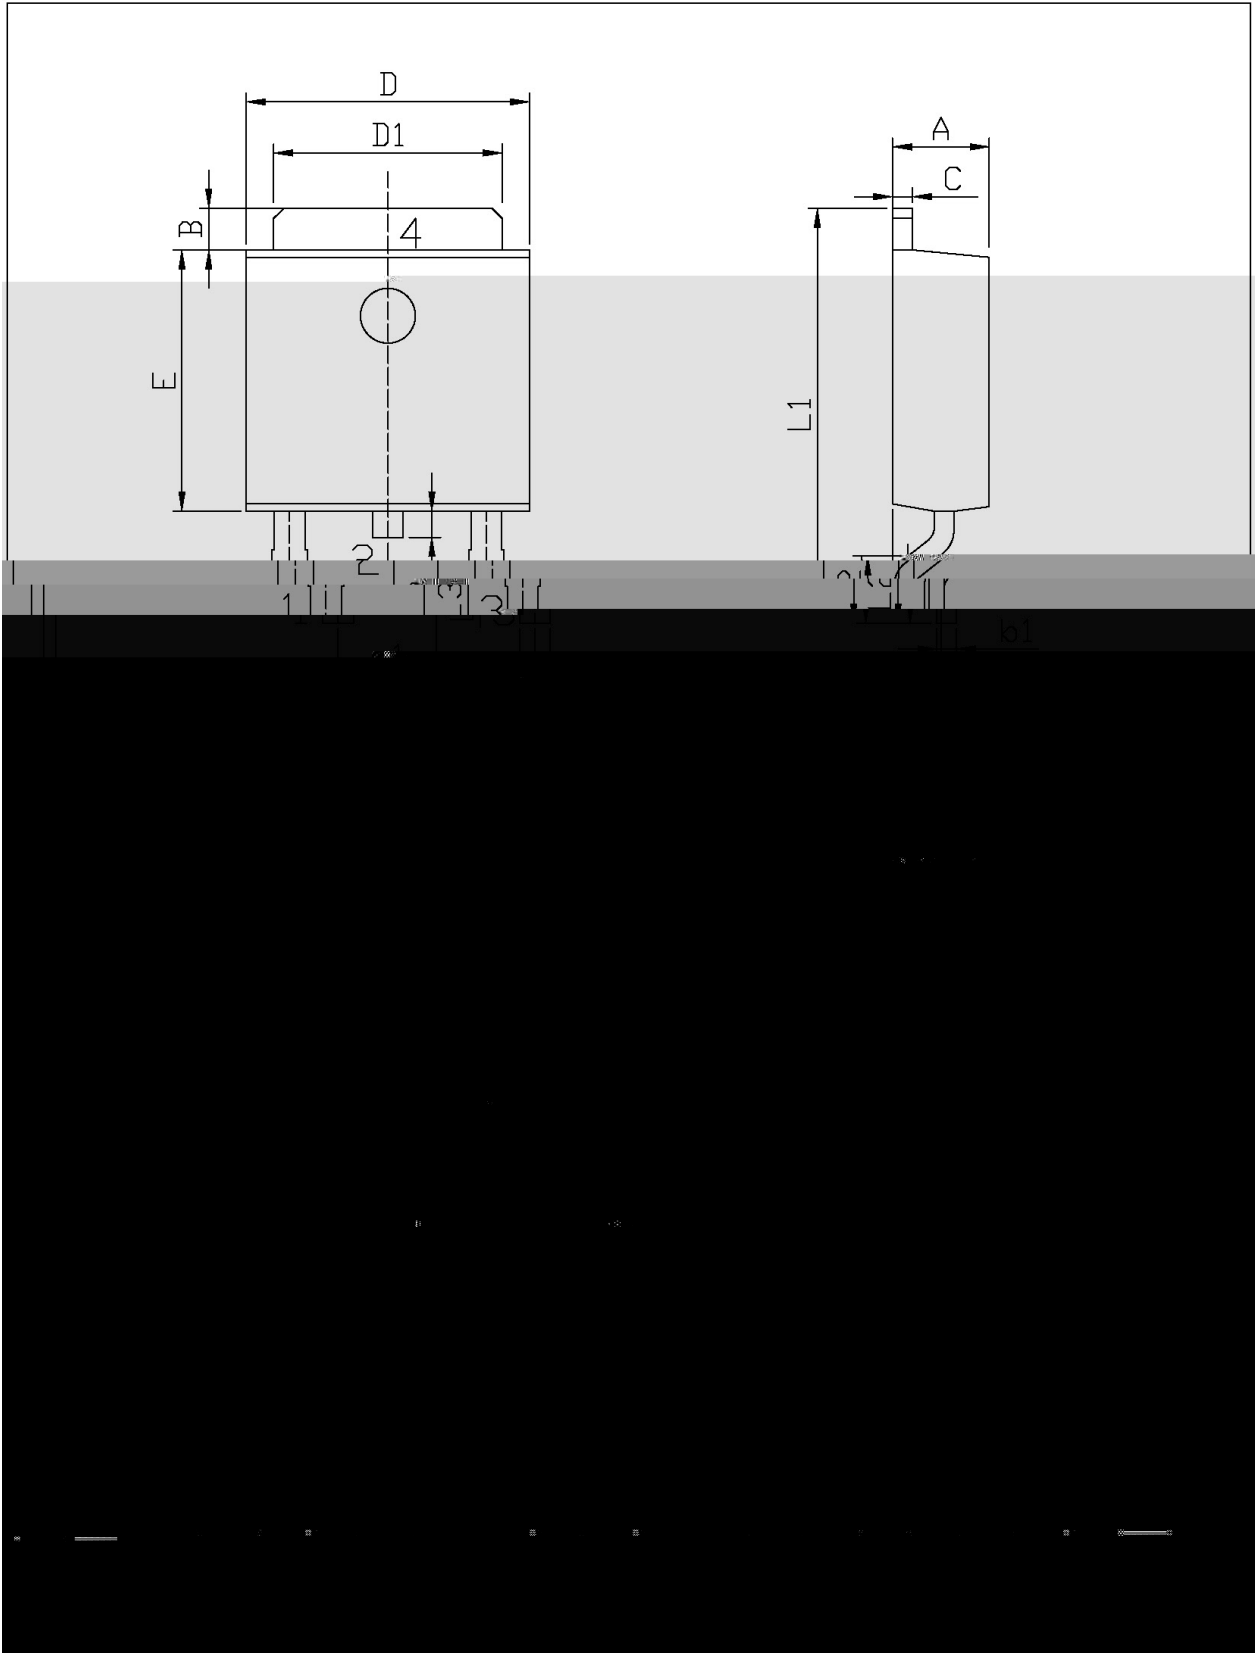

## / Marking Instructions

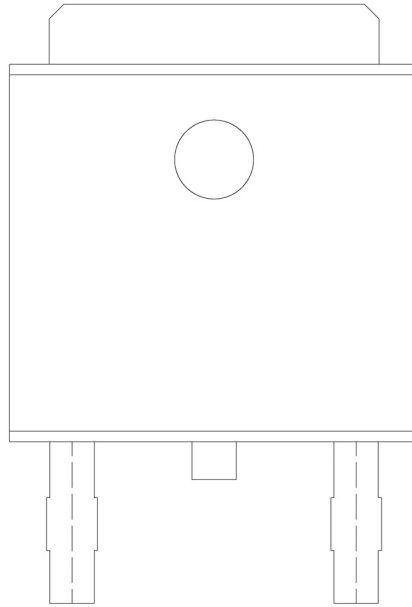


BR

LV10150

CT:

\*\*\*\*

(     ) /

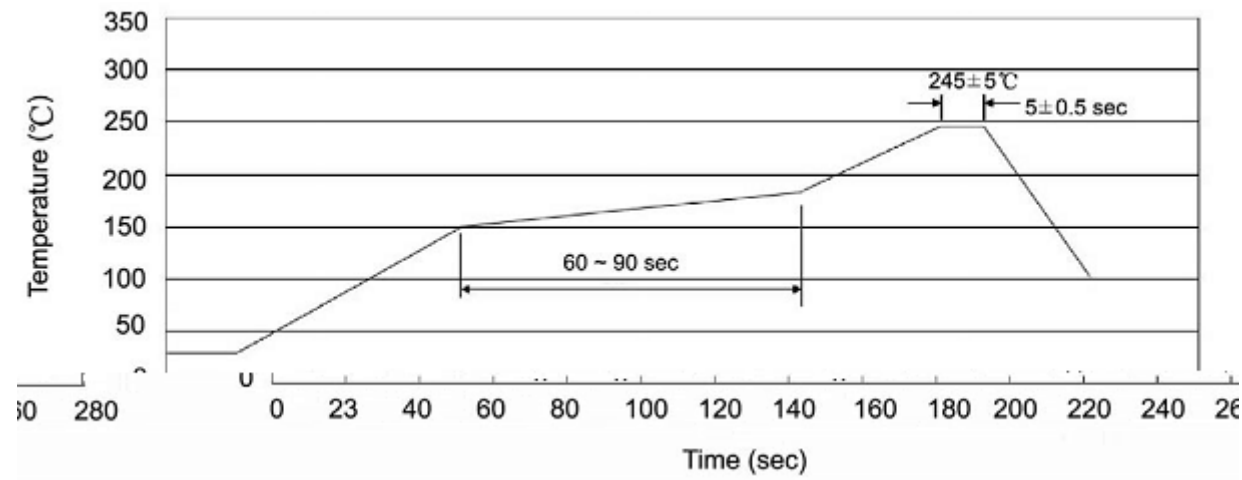

±

±

±

±

/ Resistance to Soldering Heat Test Conditions

±

±

/ Packaging SPEC.

| 封装形式 | 包装数量 |      |     |     |     | 包装尺寸 |   |   |
|------|------|------|-----|-----|-----|------|---|---|
|      | 只 卷盘 | 卷盘 盒 | 只 盒 | 盒 箱 | 只 箱 |      | 盒 | 箱 |
|      |      |      |     |     |     |      |   |   |

| 封装形式 | 包装数量 |      |     |     |     | 包装尺寸 |   |   |
|------|------|------|-----|-----|-----|------|---|---|
|      | 只 套管 | 套管 盒 | 只 盒 | 盒 箱 | 只 箱 | 套管   | 盒 | 箱 |
|      |      |      |     |     |     |      |   |   |

/ Notices