


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

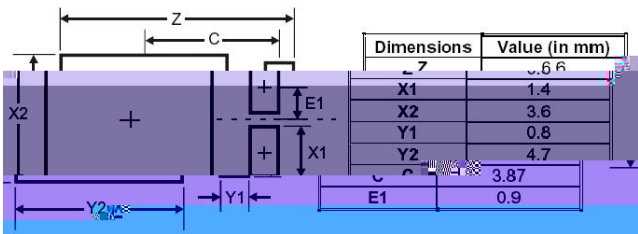

/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


			℃
			℃
	θ		℃

/ Electrical Characteristics(Ta=25)


		℃				
		℃				
		℃				
		℃				
		℃				
		℃				

- /
1. FR-4 PCB 2
2. /


/ Electrical Characteristic Curve

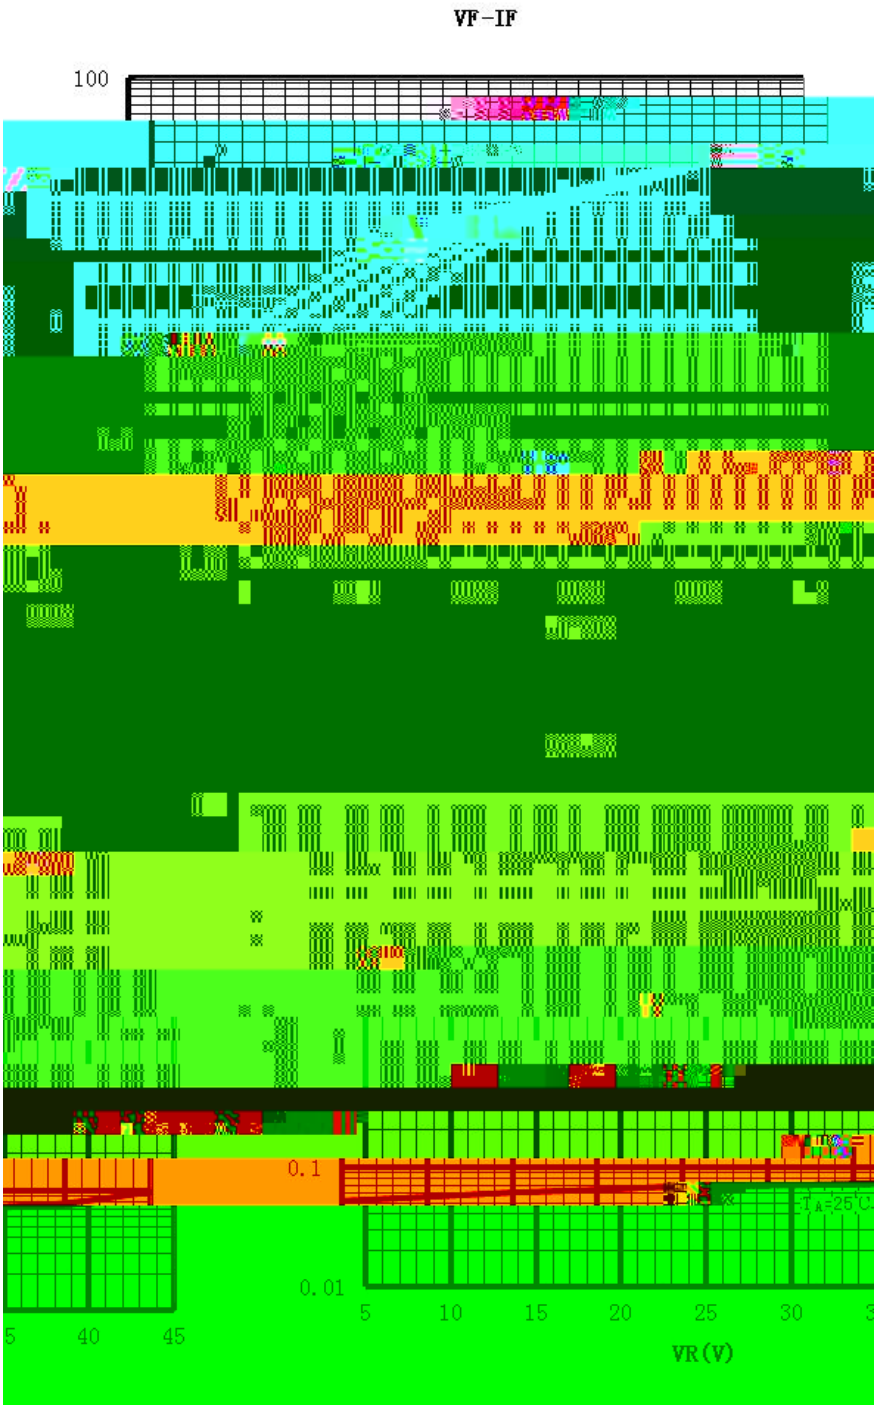

/ Package Dimensions

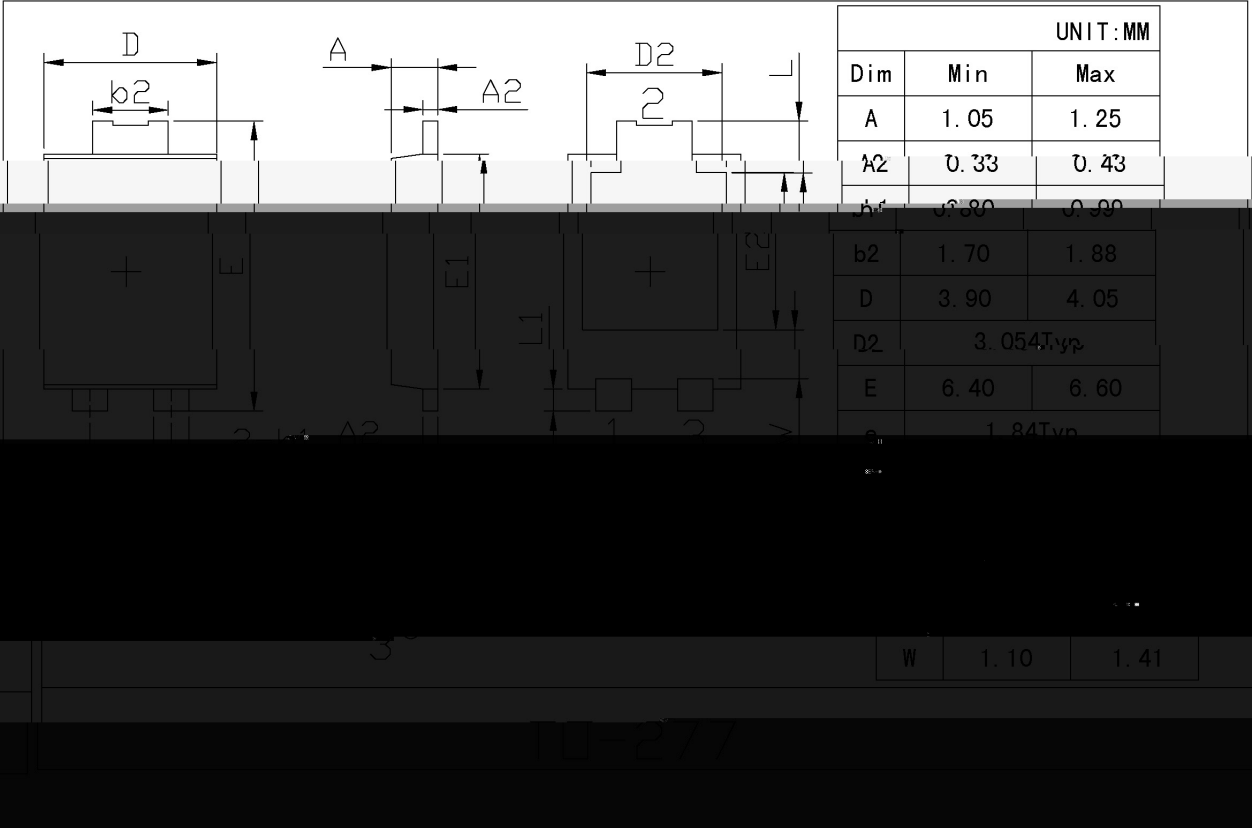


/ Marking Instructions

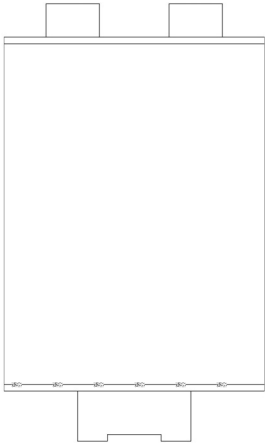

10Q45

10Q45

() /

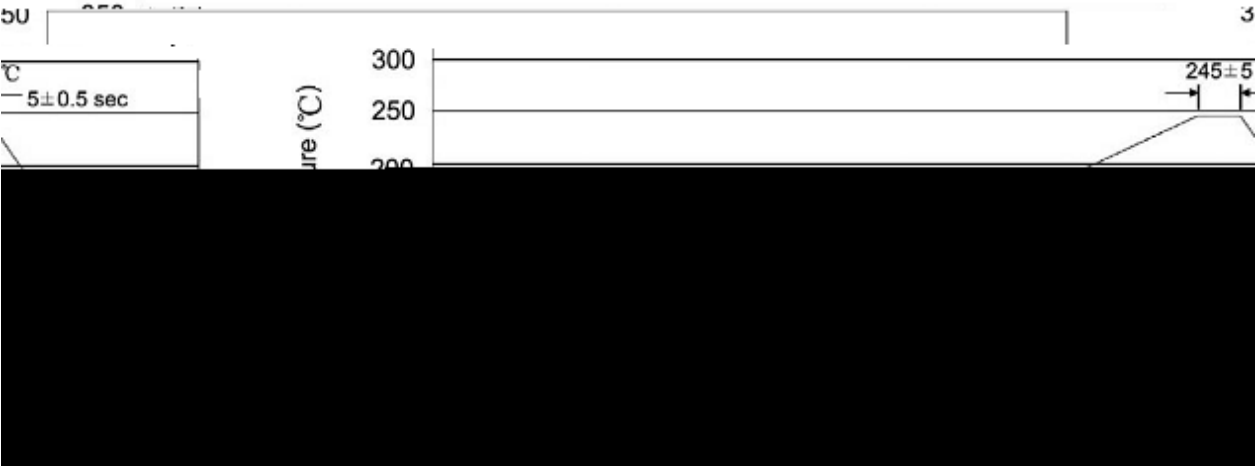

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices