


/ Descriptions

TO-252


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

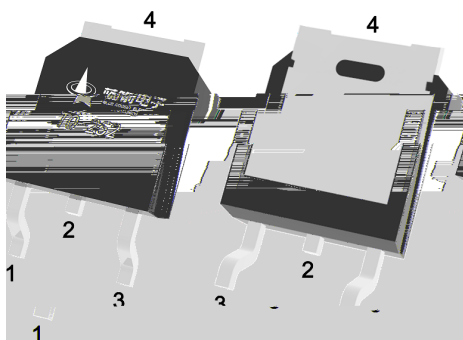

/ Marking





/ Absolute Maximum Ratings(Ta=25)

		×	


/ Electrical Characteristics(Ta=25)






1.
2.

/ Electrical Characteristic Curve

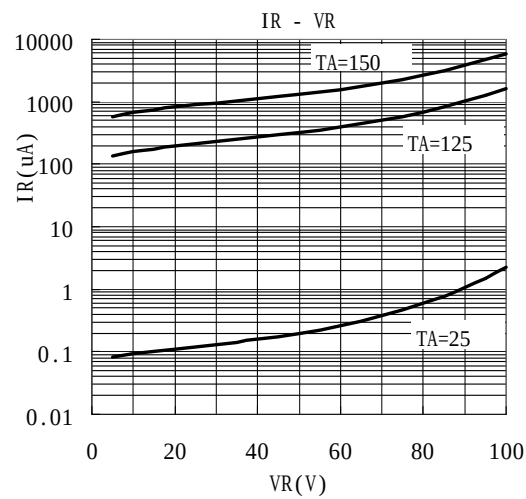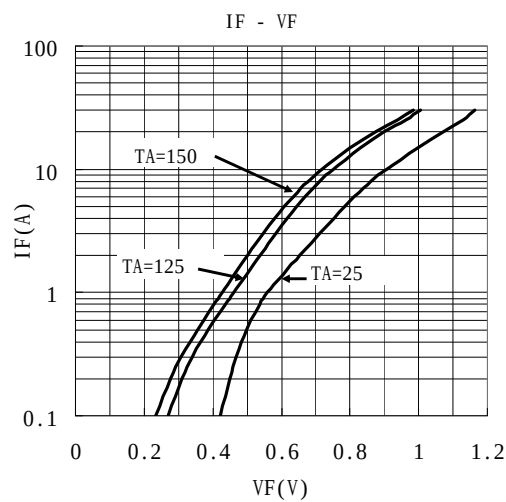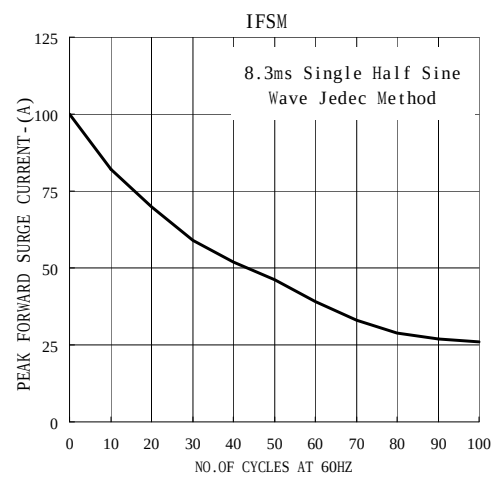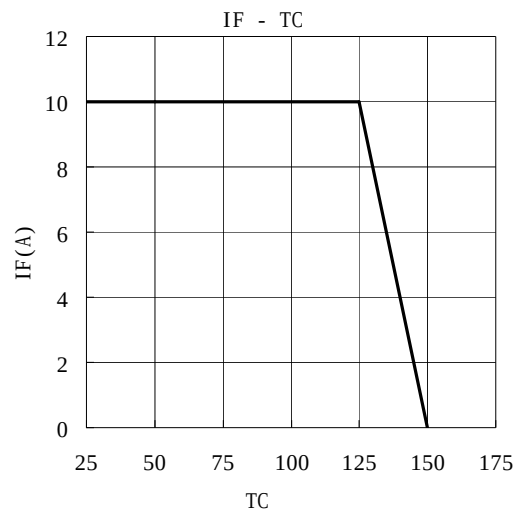


/ Package Dimensions

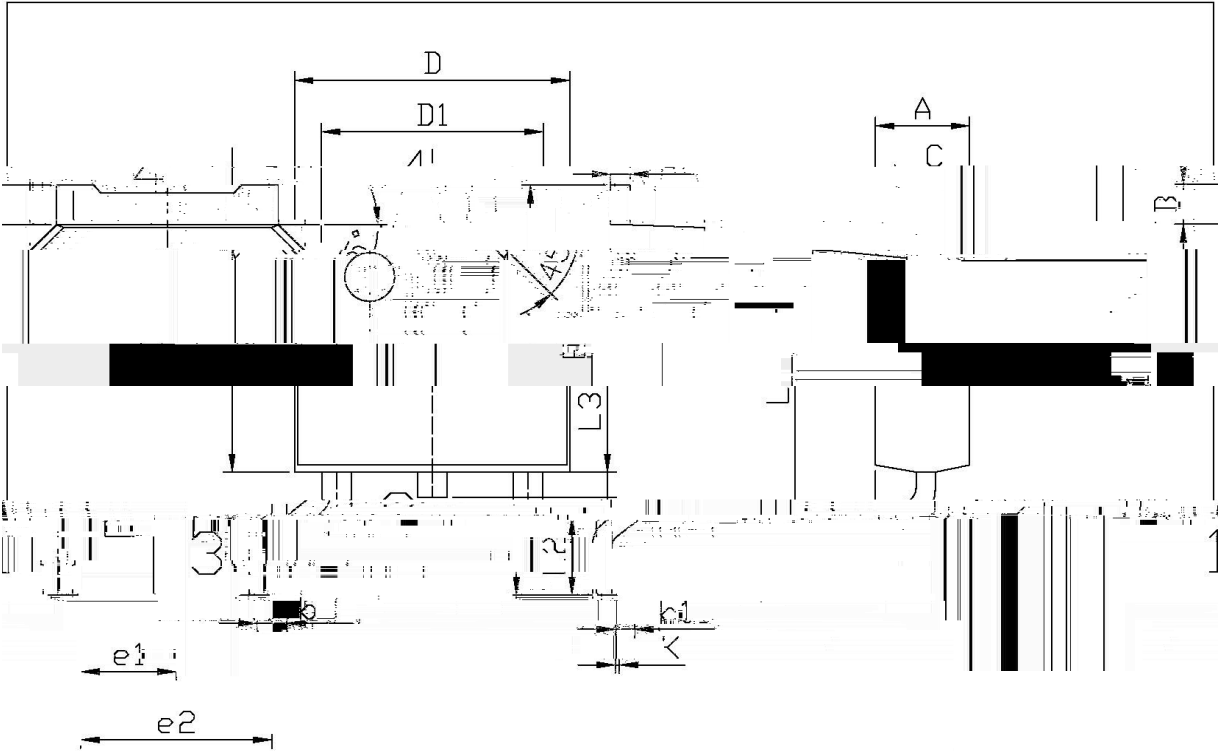

单位: mm							
Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
		Min	Max			Min	Max
		5.95	6.25			2.20	2.40
		2.24	2.34			0.95	1.25
		4.43	4.73			0.40	0.60
		L1	9.85			b1	0.45
		0.45	0.55			1.70	2.00
		6.45	6.75			0.60	0.90
		5.10	5.50			K	
TO-252							

/ Marking Instructions

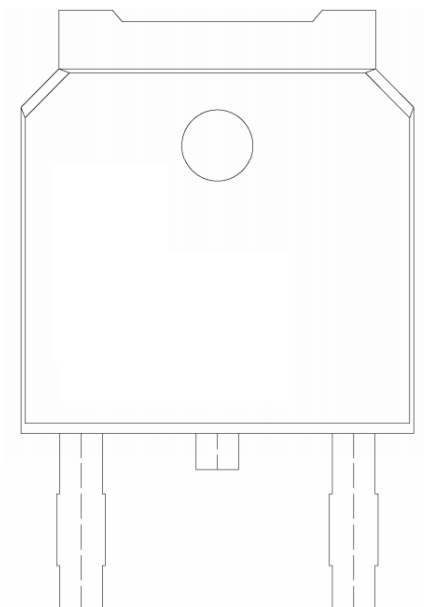


BR

MBRD10100

CT:

Ie d d d

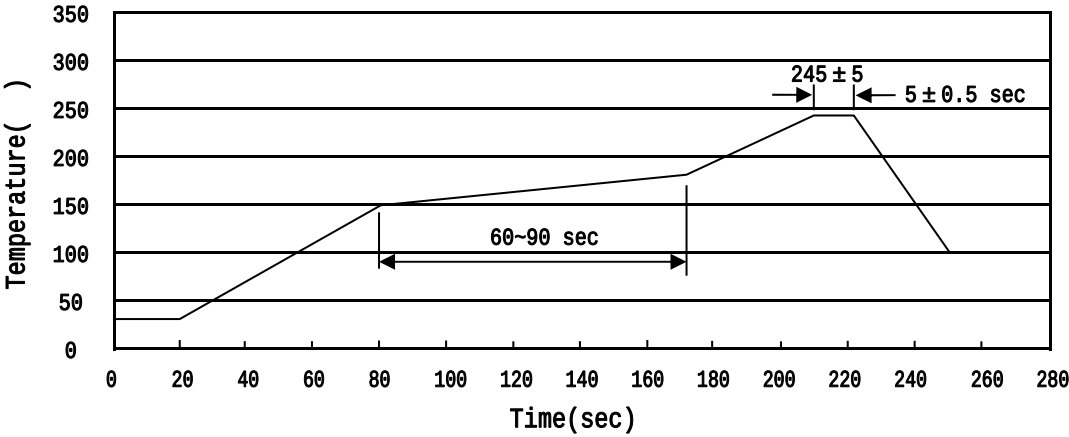

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices